



BLADE IFR

Domus Line
design

Surface aluminium LED profile

Materials:

aluminium, polycarbonate,
thermoplastic polymers

Finishes:

aluminium, black matt, dark stainless

Light source:

UHE LED module (280 LED/m)

Wiring:

2000mm



Application type:

wardrobes, kitchen cabinets



Installation:

surface

BLADE IFR is a LED profile of only 10mm thick, characterised by an asymmetric light projection, obtained with a “groove” profile configuration that shields the screen and therefore eliminates the glare effect. It is designed for surface installation inside wardrobe closets or kitchen cabinets. Available in UHE (280 LED/m) version, **BLADE IFR** is supplied with concealed fixing clips and presence sensor.



Colour appearance natural white
Colour temperature 4000 K
Luminous efficiency 82 lm/W
CRI Ra ≥ 80



Colour appearance warm white
Colour temperature 3000 K
Luminous efficiency 82 lm/W
CRI Ra ≥ 80

* values referring to BLADE UHE IFR 1000mm



BLADE UHE IFR SX


with presence sensor on left side



Code	Length	Watt & Volt
13584_ _ _ **/UHE	380mm	3W @ 24Vdc
13585_ _ _ **/UHE	530mm	4,5W @ 24Vdc
13586_ _ _ **/UHE	830mm	7,5W @ 24Vdc
13587_ _ _ **/UHE	1130mm	10,5W @ 24Vdc

Code	Finish*
05	aluminium
32	black matt
50	dark stainless

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.

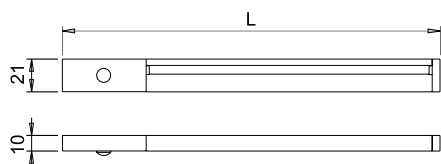

BLADE UHE IFR DX

with presence sensor on right side



Code	Length	Watt & Volt
13580_ _ _ **/UHE	380mm	3W @ 24Vdc
13581_ _ _ **/UHE	530mm	4,5W @ 24Vdc
13582_ _ _ **/UHE	830mm	7,5W @ 24Vdc
13583_ _ _ **/UHE	1130mm	10,5W @ 24Vdc

Code	Finish*
05	aluminium
32	black matt
50	dark stainless

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.



BLADE IFR incorporates an infrared sensor so that the cabinet interior light automatically switches on and off when the door opens and closes.



BLADE IFR is easily installed on surface with steel clips hidden on the back of the profile.



BLADE UHE IFR SX

Designed for under cabinet against the wall installation with sensor on left side. Light projection towards the center of the cabinet.



BLADE UHE IFR DX

Designed for under cabinet against the wall installation with sensor on right side. Light projection towards the center of the cabinet.

FINISHES



ALUMINIUM (code 05)



BLACK MATT (code 32)



DARK STAINLESS (code 50)

For LED converters and accessories see page 76 or consult the **Domus Extra catalogue** also available on www.domusline.com.

