


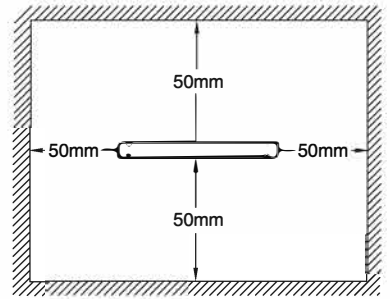


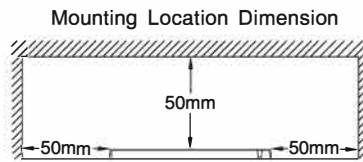

D-PRO 30/24D

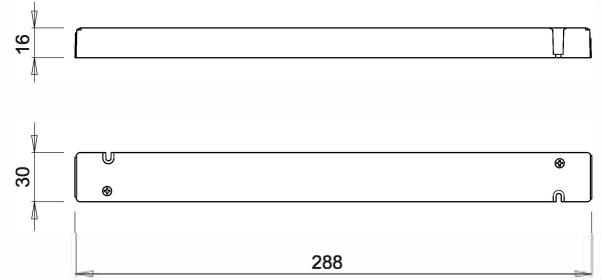

D-PRO 30/24D

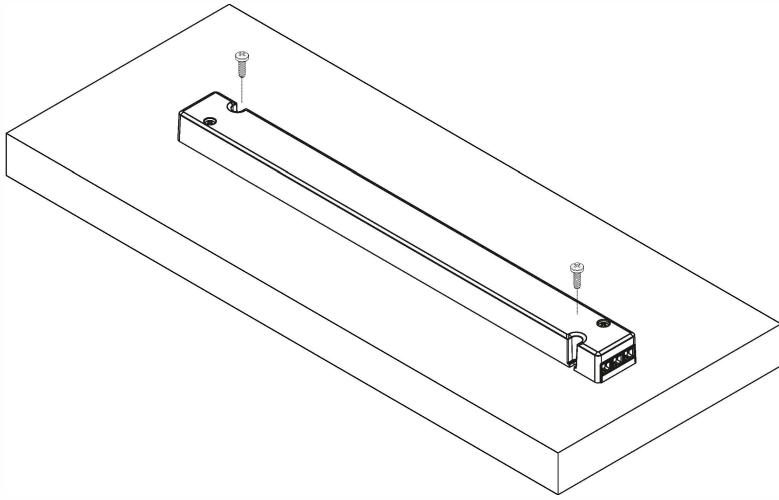

DOMUS LINE
 D-PRO 30/24D
 LED POWER SUPPLY / LED 전원 공급 장치 / LED 電源供給装置 (LED 電源供給装置)
 Product code: YYYVVM/DD / AS: 02-6052-7151
 Made in China 中国
 사용 전 주의 사항
 이 제품은 전기 안전을 보장하기 위해 고압으로 충전된 부품이 포함되어 있습니다.
 이러한 위험을 피하기 위해 설치 및 교체 시 적절한 안전 조치를 취하십시오.
 CAUTION: RISK OF SHOCK! DRY LOCATIONS USE ONLY!
 ATTENTION: RISQUE DE CHOC! POUR EMPLACEMENTS SECS SEULEMENT!

PRI 輸入/入力/입력: 100-240VAC 50/60Hz 0.50A 39W $\lambda \geq 0.9$
 SEC 輸出/出力/출력: 24VDC max 1.25A max 30W
 Tc 75 °C Ta 45 °C (except North America)
 Tc 75 °C Ta 25 °C (for North America only)

CE, UKCA, SELV, UL LISTED, and other certification logos.

DOMUS LINE
 D-PRO 30/24D
 LED POWER SUPPLY / LED 전원 공급 장치 / LED 電源供給装置 (LED 電源供給装置)
 Product code: YYYVVM/DD / AS: 02-6052-7151
 Made in China 中国
 사용 전 주의 사항
 이 제품은 전기 안전을 보장하기 위해 고압으로 충전된 부품이 포함되어 있습니다.
 이러한 위험을 피하기 위해 설치 및 교체 시 적절한 안전 조치를 취하십시오.
 CAUTION: RISK OF SHOCK! DRY LOCATIONS USE ONLY!
 ATTENTION: RISQUE DE CHOC! POUR EMPLACEMENTS SECS SEULEMENT!

PRI 輸入/入力/입력: 100-240VAC 50/60Hz 0.50A 39W $\lambda \geq 0.9$
 SEC 輸出/出力/출력: 24VDC max 1.25A max 30W
 Tc 75 °C Ta 45 °C (except North America)
 Tc 75 °C Ta 25 °C (for North America only)


CE, UKCA, SELV, UL LISTED, and other certification logos.

TYPE M24
 24VDC MAX 3A - 72W
 Micro 24 24V

D-PRO 30/24D
LED POWER SUPPLY





PRI 輸入/入力/입력: 100-240VAC 50/60Hz 0.50A 39W $\lambda \geq 0.9$
 SEC 輸出/出力/출력: 24VDC max 1.25A max 30W
 Tc 75 °C Ta 45 °C (except North America)
 Tc 75 °C Ta 25 °C (for North America only)

Power supply for lighting purposes, for use with class III LED lighting. Do not cover the LED control gear during installation.

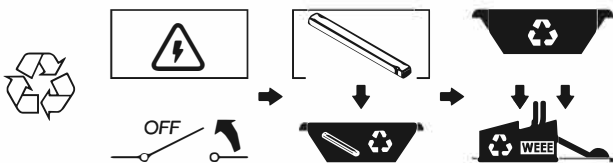



D-PRO 60/24D

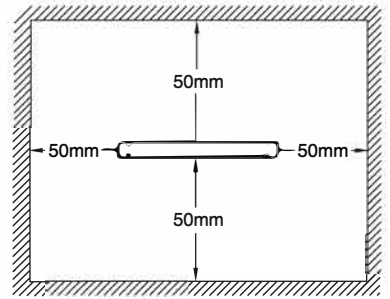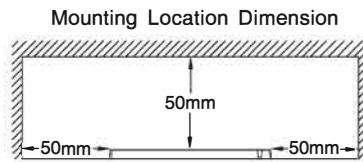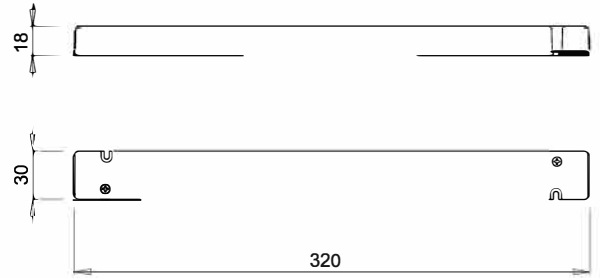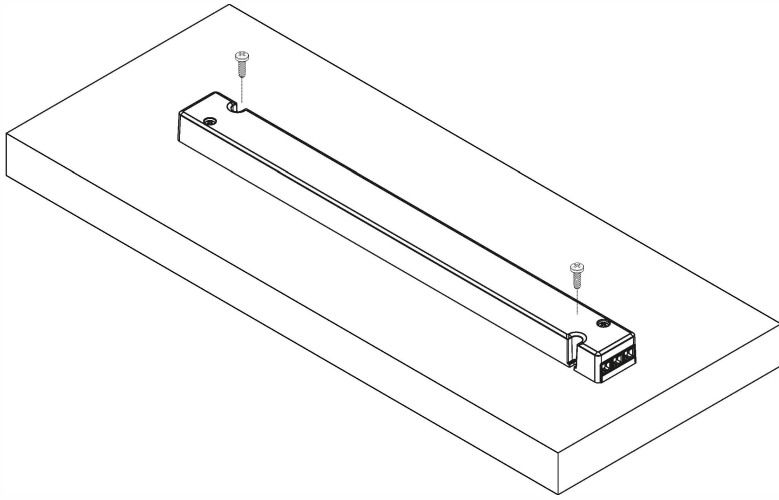

D-PRO 60/24D



<p>Developed by Domus Line Srl Via Maselli del Lavoro 1 33030 Porcia (PN) Italy</p>	<p>D-PRO 60/24D LED POWER SUPPLY / LED電源供給器 / LED 드라이버 (点灯器)</p> <p>Product code: YYY/YYMMDD AUC: 20-6002-7151 Made in China 中国</p> <p>이 제품은 안전하기 때문에 절대로 절단하지 말고, 절단 시 발생할 수 있는 위험을 항상 고려하십시오. 절단 시 발생할 수 있는 위험을 항상 고려하십시오.</p> <p>CAUTION: RISK OF SHOCK! DRY LOCATIONS USE ONLY! ATTENTION: RISQUE DE CHOC! POUR EMPLACEMENTS SECS SEULEMENT!</p>	<p>PRI 输入/入力/입력: 100-240VAC 50/60Hz 0.85A 69W $\lambda \geq 0.9$ PRI 200-240VAC 50/60Hz 0.38A (中国)</p> <p>SEC 输出/出力/출력: 24VDC max 2.5A max 60W</p> <p>Tc 90 °C Ta 45 °C (except North America) Tc 75 °C Ta 25 °C (for North America only)</p>		
---	---	--	--	--

<p>Developed by Domus Line Srl Via Maselli del Lavoro 1 33030 Porcia (PN) Italy</p>	<p>D-PRO 60/24D LED POWER SUPPLY / LED電源供給器 / LED 드라이버 (点灯器)</p> <p>Product code: YYY/YYMMDD AUC: 20-6002-7151 Made in China 中国</p> <p>이 제품은 안전하기 때문에 절대로 절단하지 말고, 절단 시 발생할 수 있는 위험을 항상 고려하십시오. 절단 시 발생할 수 있는 위험을 항상 고려하십시오.</p> <p>CAUTION: RISK OF SHOCK! DRY LOCATIONS USE ONLY! ATTENTION: RISQUE DE CHOC! POUR EMPLACEMENTS SECS SEULEMENT!</p>	<p>PRI 输入/入力/입력: 100-240VAC 50/60Hz 0.85A 69W $\lambda \geq 0.9$ PRI 200-240VAC 50/60Hz 0.38A (中国)</p> <p>SEC 输出/出力/출력: 24VDC max 2.5A max 60W</p> <p>Tc 90 °C Ta 45 °C (except North America) Tc 75 °C Ta 25 °C (for North America only)</p>		
---	---	--	--	--


D-PRO 60/24D
LED POWER SUPPLY

PRI 输入/入力/입력: 100-240VAC 50/60Hz 0.85A 69W $\lambda \geq 0.9$
PRI 200-240VAC 50/60Hz 0.38A (中国)

SEC 输出/出力/출력: 24VDC max 2.5A max 60W





Tc 90 °C Ta 45 °C (except North America)
Tc 75 °C Ta 25 °C (for North America only)

Power supply for lighting purposes, for use with class III LED lighting.
Do not cover the LED control gear during installation.

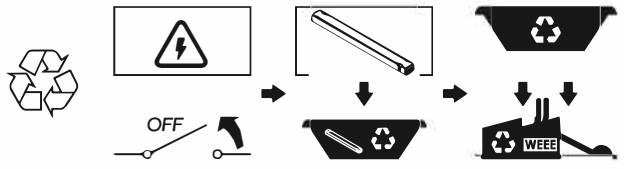



D-PRO 100/24D

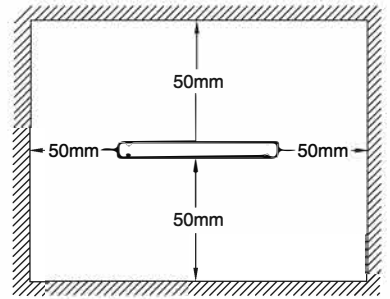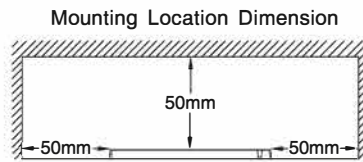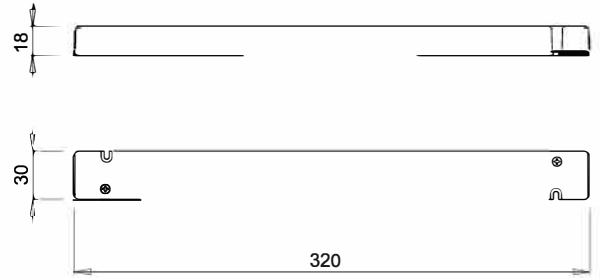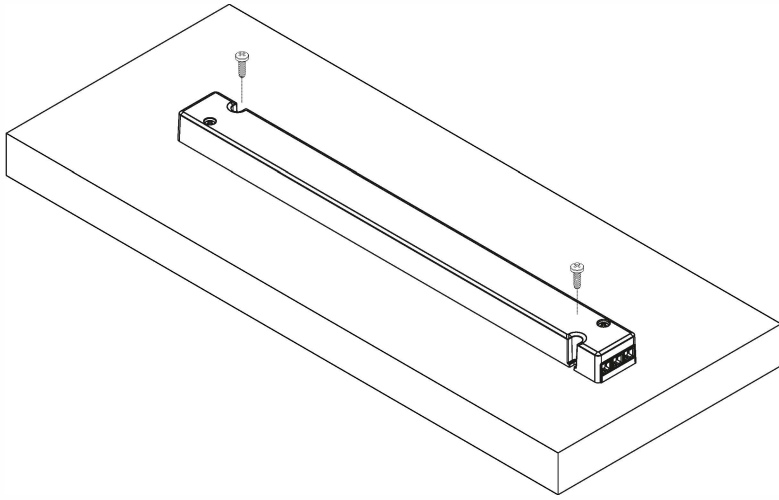

D-PRO 100/24D



Developed by Domus Line Srl
Via Masetti del Lavoro 1
33080 Porcia (PN) Italy

D-PRO 100/24D
LED POWER SUPPLY / LED 트라이프 / LED 電源 (LED 駆動器)

Product code: YYYYMMDD
ANSI: 02-600207-01
Made in China 中国
中国制造 / 中国制造

CAUTION: RISK OF SHOCK! DRY LOCATIONS USE ONLY!
ATTENTION: RISQUE DE CHOC! POUR EMPLACEMENTS SECS SEULEMENT!

PRI 輸入/入力/입력: 100-240VAC 50/60Hz 1.3A 113.5W $\lambda \geq 0.95$
PRI 200-240VAC 50/60Hz 0.7A (中国)

SEC 輸出/出力/출력: 24VDC max 4.17A max 100W (except North America)
24VDC max 4A max 96W (for North America only)

Tc 90 °C Ta 45 °C (except North America)
Tc 75 °C Ta 25 °C (for North America only)

Developed by Domus Line Srl
Via Masetti del Lavoro 1
33080 Porcia (PN) Italy

D-PRO 100/24D
LED POWER SUPPLY / LED 트라이프 / LED 電源 (LED 駆動器)

Product code: YYYYMMDD
ANSI: 02-600207-01
Made in China 中国
中国制造 / 中国制造

CAUTION: RISK OF SHOCK! DRY LOCATIONS USE ONLY!
ATTENTION: RISQUE DE CHOC! POUR EMPLACEMENTS SECS SEULEMENT!

PRI 輸入/入力/입력: 100-240VAC 50/60Hz 1.3A 113.5W $\lambda \geq 0.95$
PRI 200-240VAC 50/60Hz 0.7A (中国)

SEC 輸出/出力/출력: 24VDC max 4.17A max 100W (except North America)
24VDC max 4A max 96W (for North America only)

Tc 90 °C Ta 45 °C (except North America)
Tc 75 °C Ta 25 °C (for North America only)

TYPE M24 24VDC MAX 3A - 72W

24V

D-PRO 100/24D
LED POWER SUPPLY

PRI 輸入/入力/입력: 100-240VAC 50/60Hz 1.3A 113.5W $\lambda \geq 0.95$
PRI 200-240VAC 50/60Hz 0.7A (中国)

SEC 輸出/出力/출력: 24VDC max 4.17A max 100W (except North America)
24VDC max 4A max 96W (for North America only)

Tc 90 °C Ta 45 °C (except North America)
Tc 75 °C Ta 25 °C (for North America only)

Power supply for lighting purposes, for use with class III LED lighting.
Do not cover the LED control gear during installation.

