



FLEXYLED SE H4-24

Domus Line
design

Recessed LED profile in silicone

Materials:

silicone, thermoplastic polymers

Finishes:

white

Light source:

SHE LED module (180 LED/m)

Wiring:

2000mm



Application type:

universal

Installation:

recessed

FLEXYLED SE H4-24 is a 24Vdc flexible linear LED profile developed by implementing a new extrusion technology of diffusing silicone materials. FLEXYLED SE H4-24 is specifically designed for recessed installation in grooves with a width of just 4 mm and a depth of 8 mm flushed with the panel. Available in four pre-wired modules (100, 200, 250 and 300 centimetres), it can be divided every 33 mm.



* values referring to FLEXYLED SE H4 24 1000mm

Colour appearance	warm white
Colour temperature	3100 K
Luminous efficiency	75 lm/W
CRI	Ra ≥ 90




FLEXYLED SE H4-24 CE EAC IP44

SKU	Longitud	Watt & Volt
290.507	1000mm	19,2W @ 24Vdc
290.568	2000mm	19,2W @ 24Vdc
290.569	3000mm	19,2W @ 24Vdc



Code	Light colour*
B	warm white

CONVERTER NOT INCLUDED. TO BE ORDERED SEPARATELY.




EXTREME FLEXIBILITY

Thanks to the flexibility of the strip led, FLEXYLED SE H4-24 can be used to install the luminaire in a straight, curved or circular groove or in any other configuration.

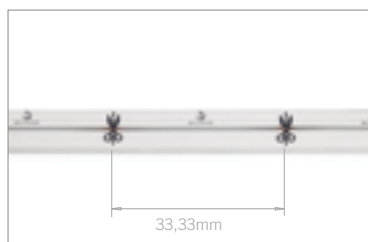

MODULARITY

FLEXYLED SE H4-24 can be divided at 33,33mm intervals (6 LEDs).

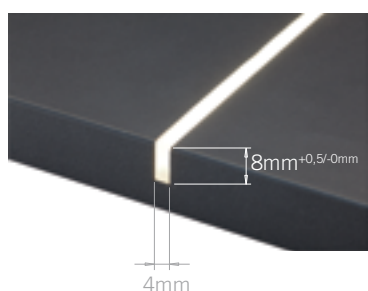

PRESS-ON INSTALLATION

The FLEXYLED SE H4-24 does not require glue or other kinds of adhesive, as it is made from soft silicone that is simply pressed into the groove. It is ideal for the sides of wardrobes.

TECHNICAL DATA

Power	see table
Power supply	24Vdc
LEDs/metre	180
Divisibility	3,3cm (6 LED)
Cable	2000mm
Protection	IP44
3M® adhesive	no