



Mini Barbed Channel Lock

Routing Instructions

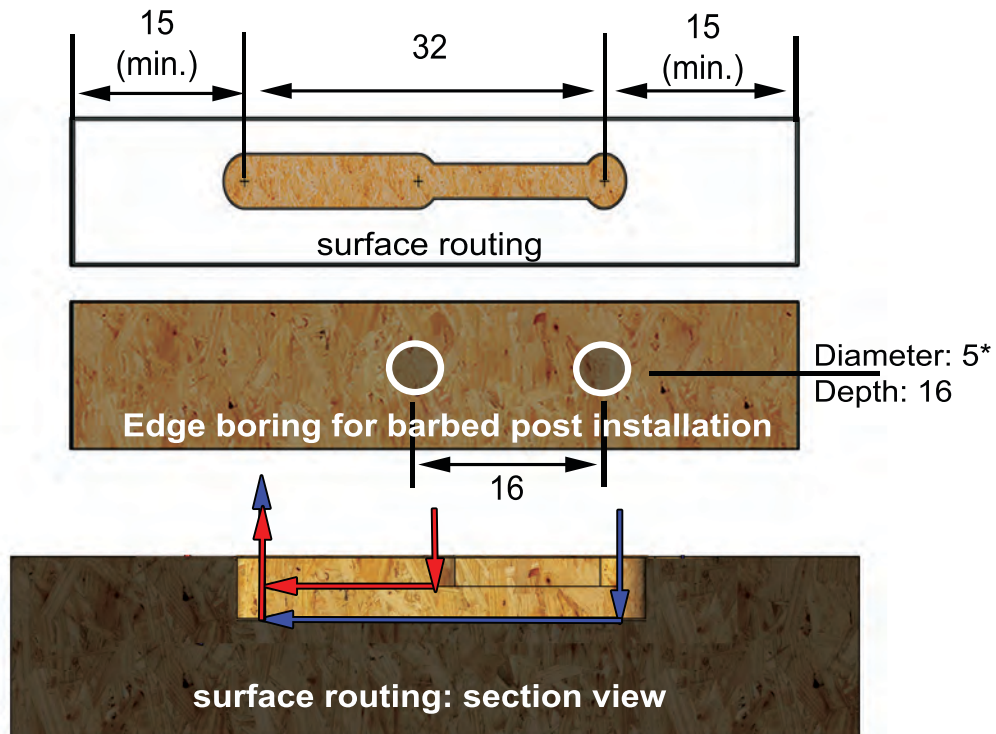

- Plunge Cut: Z: -3.0 Slot Cut: X: 0 to 18
 - Plunge Cut: Z: -6.0 Key Slot: X: -14 to 18
- (Allowable Depth Range is -6.0 to -6.3)

Route RED first. Then BLUE.

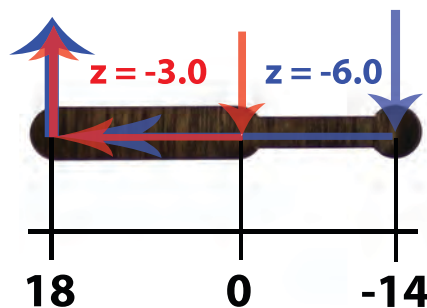

• All measurements are in mm.
* If using MDF, replace 5mm Drill Bit with 5.2mm Drill Bit.